

# TONALTILE

PUR treated solid flexible vinyl tiles.



**5019** Caribbean Blue



**5016** Midnight Black



**5023** Slate Grey



**5027** Dark Platinum




**5034** Cool Grey



**5044** Pale Shamrock



**5049** Tuscan Beige

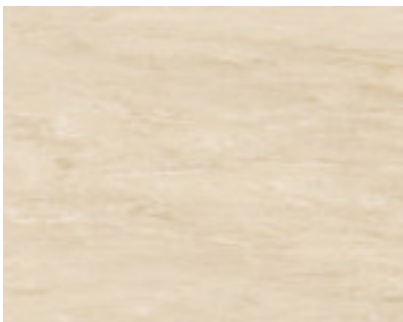

**5056** Alabaster Pearl



**5069** Warm Sand

## DURAFLOOR

# TONALTILE

PUR treated solid flexible vinyl tiles. 300mm x 300 mm.



## Performance

TonalTile is a heavy duty, homogeneous vinyl floor tile, suitable for use in most contract and housing applications. It is PUR treated for ease of maintenance, and requires no immediate use of acrylic emulsion after installation. It is suitable for medium to heavy duty traffic areas, which makes it ideal for shops, schools, offices and housing projects.

## Installation

All installations must be carried out in accordance with the EN BS8203-2017. Please ensure the subfloor is smooth, hard, dry and clean and that a damp proof membrane has been installed, if appropriate. Allow floorcovering to acclimatise for 24 hours at room temperature (15 - 20°C) before laying. We recommend TonalTile is installed using PROBOND® Vinyl Adhesive or similar on absorbent subfloors.

## Maintenance

We recommend mechanical washing at 300-400 rpm (with water recovery) or damp mopping using an alkaline detergent at first use. For daily cleaning use a neutral detergent; cleaning method damp mopping or mechanical washing.

Never use abrasive disks or solvents. Do not use rubber caps (for chair legs or other furniture); use PVC or Polyethylene caps.

## Product Specifications

### Dimensions



**Total Thickness**  
2.0mm



**Total Weight**  
3300 g/m<sup>2</sup>



**Size of Tile**  
300 x 300mm

### Technical Data



**Wear Rating**  
34/43



**Wear Group M**  
**Wear resistance**  
≤ 7.5 mm<sup>3</sup>



EN685/34



EN685/43



**Slip Resistance**  
DIN 51130 - R9



**Fire Rating**  
EN 13501-1 / Bfl - s1



**Static Electrical Propensity**  
EN 1815 - < 2kV



**Acoustic Insulation**  
ISO 717-2 - 4dB



**Colour Fastness**  
EN 20105 - B02 ≥ 6



**Residual Indentation (norm)**  
EN ISO 24343-1 < 0.10 mm



**Dimensional Stability**  
ISO 23999  
Tile ≤ 0.25 %



**Underfloor Heating**  
Suitable



**Chemical Products Resistance**  
EN ISO 26987



Flexible



Tough &  
durable

100% Recyclable  
25% Recycled content



Easy to clean

100% REACH compliant  
recycled content

## DURAFLOR

01592 630 030  
uksales@duraflor.com

DURAFLOR.COM

CI/SfB	(43)	Tn6
--------	------	-----