Progression II Specifications

Dimensions



Tile Size 500 x 500mm





Total Thickness

Total Weight

4,300g/m²

Construction

Pile Type 100% Solution Dyed Nylon **Tuft Density** 171,260/m²

Guarantee

10 year commercial wear

Technical Data



Fire Rating
| B_{II}-s1 | ISO 13501-1 (ISO 13501-1 Cfl-S1



Impact Sound Reduction ISO 140-8: 26 dB



Light Fastness ISO 105 Scale 6



Castor Chair Test



Antistatic EN 6356 <2kV **Permanently Antistatic**



Wear Rating **33 Heavy Contract** Colour Fastness (Rubbing) ISO 105 - X12 >4

Colour Fastness (Water) ISO 105 >5

Hot Metal Nut Test BS 4790


part of the Langford Group

Duraflor is part of the Langford Group and exclusively distributed by SASGO Limited, the sales and service arm of the Group.


All colours are for illustrative purposes only. If colour choice is critical, please request a sample.

PROGRESSION II

Our most popular range has had a refresh, with popular colours to suit every commercial environment.

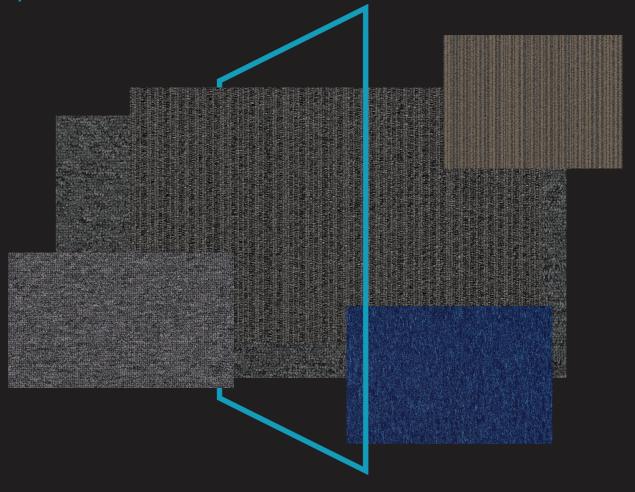

DURAFLOR

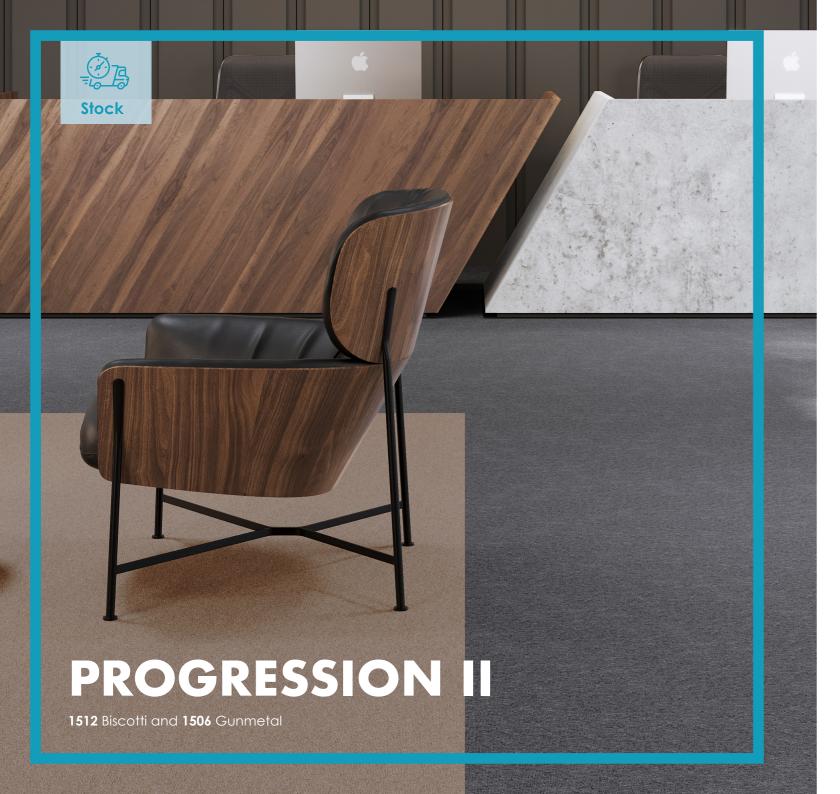

Our refreshed **PROGRESSION** range includes all the most popular colours for commercial spaces in both plain and stripped designs



1520 Linseed

Product Specifications

Dimensions



Tile Size 500 x 500mm



Total Thickness 6mm





Tuft Density

171,260/m2

Total Weight Total Weig 4300g/m²

Construction

Pile Weigh 500g/m²

Pile Type

100% Solution Dyed Nylon

Technical Data



Fire Rating
BS EN 13501–1 Cfl–s1



Light Fastness ISO 105 Scale 6



Wear Rating BS EN 1307 Class 33 **Heavy Contract**

Castor Chair Test EN985/A ≥2.4 Colour Fastness (Rubbing) ISO 105 - X12 >4

Antistatic EN 6356 < 2kV

Colour Fastness (Water) ISO 105 ≥5

Laying Pattern

Broadloom, Brickbond, Ashlar

Guarantee

10 years commercial guarantee



1506 Gunmetal



1509

Clay

1530 Black Ash



Iron Strata



1537 **Grey Contours**

1524











Dark Night

1546 Coastal Lines

1543

1518

Fairway



1549 Whirlpool



Cobblestone

1526 1551 Breaker Blue Denim



Biscotti

1512



1541 Amethyst